



1200-S-MC

© EBELCO COPYRIGHT 2019.

FEATURES :

- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Built-in Mag.Contact For Door Status Monitoring
- ✓ Durable & Silence Operation
- ✓ Cosmetize Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Anti-Tamper Jam Nuts
- ✓ Full Range Of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button

SPECIFICATIONS :



- 1 **Voltage Input** : 12 VDC / 24 VDC
- 2 **Current Draw** : 12V / 420mA ; 24V / 210mA (±5%)
- 3 **Holding Force** : Up to 1200 lbs (545 kg)
- 4 **Magnetic Contact Rating** : 40 VDC, 0.25A, 10W
- 5 **Anti-Rust Surface Treatment** : Blue Zinc Plating
- 6 **Operating Temperature** : 0~55° C (32~131° F)
- 7 **Operating Humidity** : 0~95% (non condensing)
- 8 **Weight** : 4.8 kg (±1%)
- 9 **Dimensions** : Magnet - (L)266x(W)67x(T)39 mm
Armature - (L)185x(W)61x(T)16.5 mm

EBELCO electromagnetic lock **1200** series are known with its excellent holding force and remarkable features.

The series compliance to **UL, CE** and **PSB Test** are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

DOOR CONTACT SENSOR (Only for Mag.Ctc. Models)

White Wire (Mag. Ctc.)
White Wire (Mag. Ctc.)

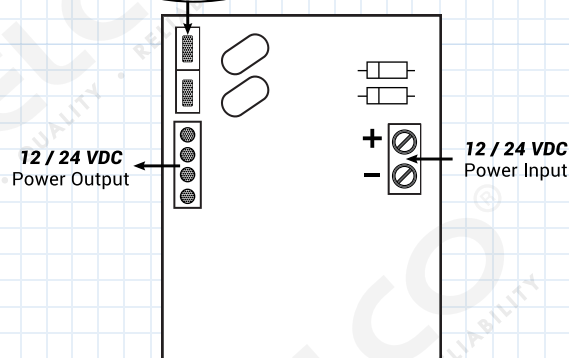

IMPORTANT !

Set the jumper position according to the power input correctly before switch **ON** the power.

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE c us RoHS

SECURITY
LISTED



SECURITY . QUALITY . RELIABILITY

EBELCO INDUSTRIES SDN. BHD. 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,
75250, Melaka, Malaysia.

☎ : [+606] 333 8855

🖨 : [+606] 333 8822

🌐 : www.ebelco.com

✉ : enquiry@ebelco.com

WWW.EBELCO.COM