



300-LED-MC

© EBELCO COPYRIGHT 2019.

FEATURES :


- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Low Current Consumption
- ✓ Reliable Holding Force
- ✓ Hall Effect Sensor Monitoring Output
- ✓ Green/Red LED Indication for EM Lock Status
- ✓ Durable & Silence Operation
- ✓ Cosmeticize Anodized Aluminum Casing
- ✓ Surge & Spike Protection PCB
- ✓ Compact Size For Small Doors, Cabinets etc.
- ✓ Full Range Of Optional Brackets
- ✓ Zero Residual Magnetism Design
- ✓ Built-in Mag.Contact For Door Status Monitoring

SPECIFICATIONS :

- 1 **Voltage Input :** 12 VDC / 24 VDC (Per Magnet)
- 2 **Current Draw :** 12V / 330mA ; 24V / 185mA (±5%)
- 3 **Holding Force :** Up to 300 lbs (136 kg)
- 4 **Hall Effect Contact :** SPDT rated 1A at 24 VDC
- 5 **Magnetic Contact Rating :** 40 VDC, 0.25A, 10W
- 6 **Anti-Rust Surface Treatment :** Blue Zinc Plating
- 7 **Operating Temperature :** 0~55° C (32~131° F)
- 8 **Operating Humidity :** 0~95% (non condensing)
- 9 **Weight :** 1.20 kg (±1%)
- 10 **Dimensions :** Magnet - (L)210x(W)35x(T)22 mm
Armature - (L)130x(W)33x(T)11 mm

EBELCO electromagnetic lock 300 series are known with its excellent holding force in compact size and remarkable features.

The series compliance to **UL, CE and PSB Test** are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

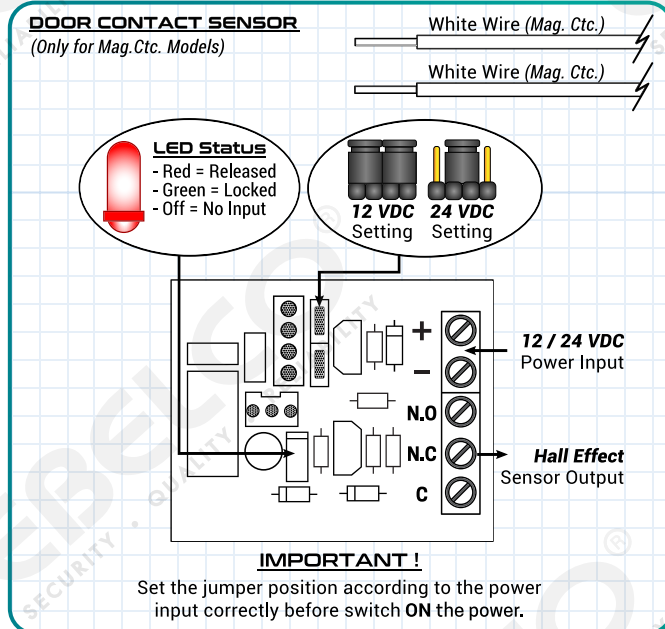

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE c US RoHS

