



© EBELCO COPYRIGHT 2019.

800-LED-TB

FEATURES :



- ✓ Extra Mounting Screws For Maximum Fitness
- ✓ Dual Voltage Selectable (12 VDC / 24 VDC)
- ✓ Selectable Re-Locking Timer 5,10,15, 25 Sec
- ✓ Built-In EXIT Push Switch Terminal
- ✓ Door Open Time Buzzer Monitoring
- ✓ Reliable Holding Force
- ✓ Hall Effect Sensor Monitoring Output
- ✓ Green/Red LED Indication For EM Lock Status
- ✓ Durable & Silence Operation
- ✓ Surge & Spike Protection PCB
- ✓ Anti-Tamper Jam Nuts
- ✓ Full Range Of Optional Brackets
- ✓ Anti Residual Magnetism Kick Off Button

SPECIFICATIONS :

- 1 **Voltage Input :** 12 VDC / 24 VDC
- 2 **Current Draw :** 12V / 510mA ; 24V / 285mA (±5%)
- 3 **Holding Force :** Up to 800 lbs (363 kg)
- 4 **Hall Effect Contact :** SPDT Rated 1A at 24 VDC
- 5 **Anti-Rust Surface Treatment :** Blue Zinc Plating
- 6 **Operating Temperature :** 0~55° C (32~131° F)
- 7 **Operating Humidity :** 0~95% (non condensing)
- 8 **Weight :** 2.4 kg (±1%)
- 9 **Dimensions :** Magnet - (L)250x(W)50x(T)29 mm
Armature - (L)182x(W)44x(T)11 mm

EBELCO electromagnetic lock **800** series are known with its excellent holding force and remarkable features.

The series compliance to **UL**, **CE** and are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with the maximum quality and reliability.

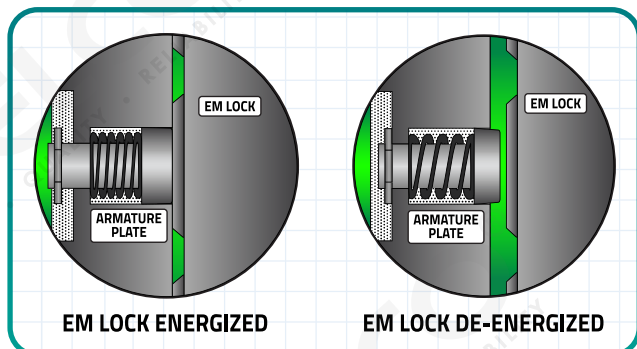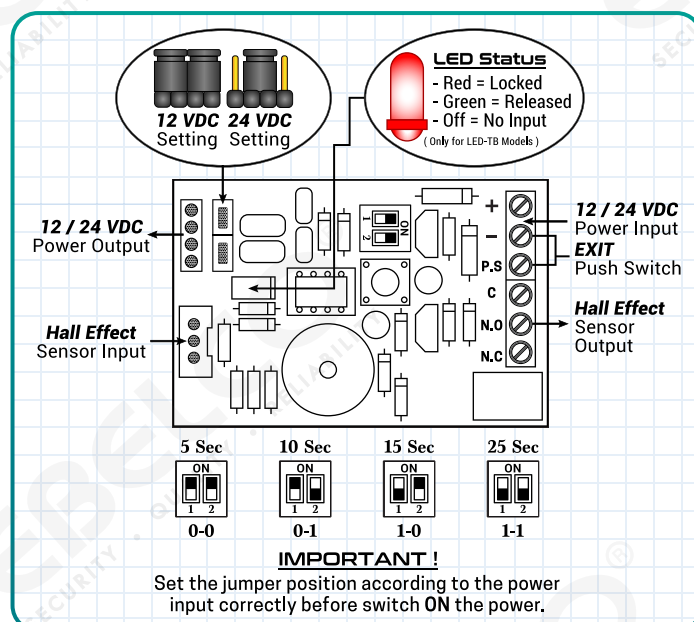

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

CE **UL** **RoHS**



SECURITY . QUALITY . RELIABILITY

EBELCO INDUSTRIES SDN. BHD. 474704-V

16, Jalan TTC 26, Taman Teknologi Cheng,
75250, Melaka, Malaysia.

☎ : [+606] 333 8855 ☎ : [+606] 333 8822

🌐 : www.ebelco.com

✉ : enquiry@ebelco.com

WWW.EBELCO.COM